

**Adjustability**

Hole size Ø75mm

**Product Specifications**

|                    |  |           |           |
|--------------------|--|-----------|-----------|
| Input Voltage      | AC 220 -240V, 50-60Hz  |           |           |
| Fixture Power      | 10W  | 13W       | 15W       |
| Driving Current    | 250 mA   | 300 mA    | 350 mA    |
| Lumen Output*      | 425 lm   | 535 lm    | 610 lm    |
| Fixture Efficiency | 42.5 lm/w  | 41.1 lm/w | 40.6 lm/w |
| CRI                | 90   |           |           |
| Color Temperature  | 2700K/3000K/4000K  |           |           |
| Beam Angle         | 15°  |           |           |
| Source Type        | Citizen COB LED  |           |           |
| Power Factor       | -  |           |           |
| Shielding Angle    | 60°  |           |           |
| Control Method     | Not dimmable, Phase-cut dimming, 0/1-10V dimming, DALI dimming |           |           |

|                    |                                 |
|--------------------|---------------------------------|
| MacAdam Ellipse    | <3 SDCM                         |
| CCT Tolerance      | ± 100 K                         |
| UGR                | <19                             |
| Product Dimensions | Ø86*97 mm                       |
| Hole Size          | Ø75 mm                          |
| Weight             | 0.41 kg                         |
| Package Size       | L11.7*11*13.5 cm                |
| Carton Size        | 24PCS/CTN, L46.5*W37.5*H29.5 cm |

|                     |                                      |
|---------------------|--------------------------------------|
| Safety Class        | Class II                             |
| Ambient Temperature | -20°C-50°C                           |
| Storage Temperature | -20°C-50°C                           |
| Lumen Maintenance   | -20°C-50°C, LED 50000H L90/B10-Ta25° |
| IP Rating           | IP20                                 |
| Housing Material    | Die-cast Aluminium                   |
| Housing Color**     | RAL 9006, RAL 9016, RAL 9005         |
| Warranty            | 3 years                              |

\*Lumen output measured @ 2700K, 15° optics, ambient temperature 25°C

\*\*RAL 9006 White aluminium, RAL 9016 Traffic white, RAL 9005 Jet black


**Ordering code**

| NO.     | Housing color   | Watt                                | CRI | CCT                                    | Beam Angle | Control Method  | Reflector        |
|---------|---|-------------------------------------|-----|--|------------|---|------------------|
| 01.0511 | YW - Matt white<br>YB - Matt black<br>XX - Customized Color | 010 - 10W<br>013 - 13W<br>015 - 15W | 90  | 27 - 2700K<br>30 - 3000K<br>40 - 4000K | 15 - 15°   | F - Standard on-off<br>P - Phase dimming<br>A - 0/1-10V dimming<br>D - Dali dimming | 0 - No Reflector |


Example: 01.0511YW010902715F0

**Photometric Distribution**


10W 15° 2700K




13W 15° 2700K



15W 15° 2700K

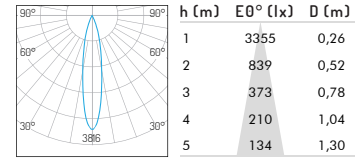

**Assembly Indication**

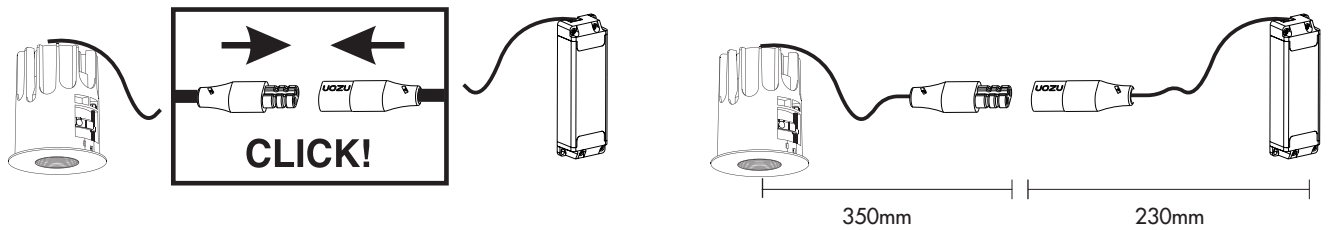

**Accessories**

