

Adjustability

Hole size Ø 59mm

### Product Specifications

Input Voltage	AC 220 -240V, 50-60Hz	
Fixture Power	10W	13W
Driving Current	250 mA	350 mA
Lumen Output*	348 lm	413 lm
Fixture Efficiency	34.8 lm/w	31.7 lm/w
CRI	90	
Color Temperature	2700K/3000K/4000K	
Beam Angle	Wall Washer	
Source Type	Citizen COB LED	
Power Factor	-	
Shielding Angle	60°	
Control Method	Not dimmable, Phase-cut dimming, 0/1-10V dimming, DALI dimming	

MacAdam Ellipse	<3 SDCM
CCT Tolerance	± 100 K
UGR	/
Product Dimensions	Ø66*79 mm
Hole Size	Ø59 mm
Weight	0.45 kg
Package Size	L11.7*11*13.5 cm
Carton Size	24PCS/CTN, L46.5*W37.5*H29.5 cm

Safety Class	Class II
Ambient Temperature	-20°C-50°C
Storage Temperature	-20°C-50°C
Lumen Maintenance	-20°C-50°C, LED 50000H L90/B10-Ta25°
IP Rating	IP20
Housing Material	Die-cast Aluminium
Housing Color**	RAL 9006, RAL 9016, RAL 9005
Warranty	3 years

\*Lumen output measured @ 2700K, 15° optics, ambient temperature 25°C

\*\*RAL 9006 White aluminium, RAL 9016 Traffic white, RAL 9005 Jet black


### Ordering code

NO.	Housing color	Watt	CRI	CCT	Beam Angle	Control Method	Reflector
01.0460	YW - Matt white YB - Matt black XX - Customized Color	010 - 10W 013 - 13W	90	27 - 2700K 30 - 3000K 40 - 4000K	WW - Wall Washer	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	0 - No Reflector

Example: 01.0460YW0109027WWF0


### Photometric Distribution

10W Wall Washer 2700K




h (m)	E (lx)	D (m)
1	244	0,90
2	61	1,80
3	27	2,70
4	15	3,60
5	9	4,50

13W Wall Washer 2700K



h (m)	E0° (lx)	D (m)
1	289	0,90
2	72	1,80
3	32	2,70
4	18	3,60
5	11	4,50

### Assembly Indication

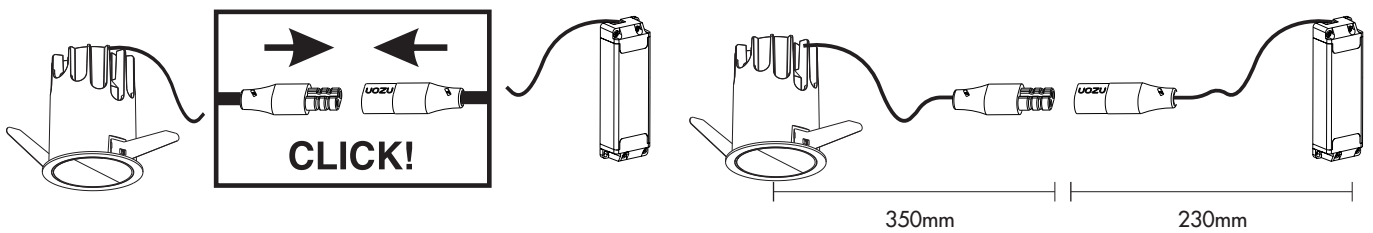

### Accessories

