

Product Specifications

Input Voltage	AC 220 -240V, 50-60Hz
Fixture Power	2W
Size	D19xL40mm
Lumen Output*	131 lm
Fixture Efficiency	65.5 lm/w
CRI	90
Color Temperature	2700K/3000K/4000K/5000K
Beam Angle	15°/30°/50°
Source Type	Citizen COB LED
Power Factor	-
Shielding Angle	/
Control Method	Not dimmable, Phase-cut dimming, 0/1-10V dimming, DALI dimming

MacAdam Ellipse	<3 SDCM
CCT Tolerance	± 100 K
UGR	/
Product Dimensions	D19xL40mm
Weight	/
Package Size	/
Carton Size	/

Safety Class	Class III
Ambient Temperature	-20°C-50°C
Storage Temperature	-20°C-50°C
Lumen Maintenance	-20°C-50°C, LED 50000H L90/B10-Ta25°
IP Rating	IP20
Housing Material	Machined Aluminium
Housing Color**	RAL 9005
Warranty	3 years

*Lumen output measured @ 2700K, ambient temperature 25°C

**RAL 9005 Jet black


Ordering code

NO.	Housing color	Watt	CRI	CCT	Beam Angle	Control Method	Reflector
03.1053	YW - Matt white YB - Matt black XX - Customized Color	002 - 2W	90	27 - 2700K 30 - 3000K 40 - 4000K 50 - 5000K	15 - 15° 35 - 35° 50 - 50°	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	0 - No Reflector


Example: 03.1053YW002902715F0

Photometric Distribution


2W 15° 3000K




2W 30° 3000K



2W 50° 3000K



Assembly Indication

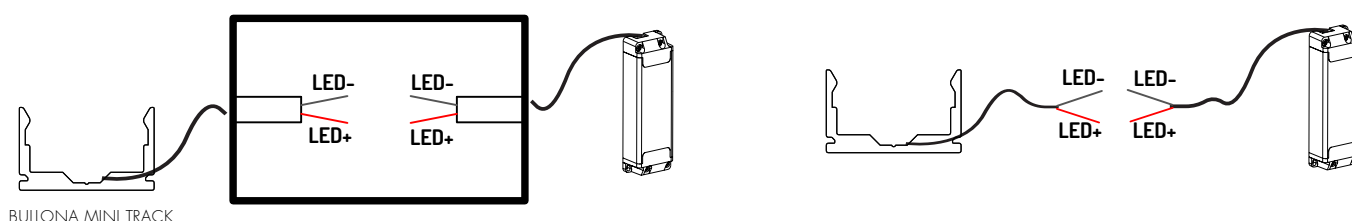


BULLONA MINI TRACK

Surface Mount & Recessed Mount




N0.	Size	Cut Out	Type	Length
P10.0001	W13.5xH8.3mm	W14xH9mm	Mini	1m / 2m / 3m / Tailored

Accessories




End cap
L13.5x W8.3 x H4.5mm





N0.	Size	Cut Out	Type	Length
P10.0002	W15.4xH16.65mm	W16xH17mm	Standard	1m / 2m / 3m / Tailored

Accessories



End cap
L15.4 x W16.65 x H4.5mm



BULLONA MINI TRACK


U O Z U®

Recessed Mount



N0.	Size	Cut Out	Type	Length
P10.0003	W19xH16.65mm	W16xH16mm	Trim	1m / 2m / 3m / Tailored





Accessories



End cap
L16 x W16 x H5.5mm

N0.	Size	Cut Out	Type	Length
P10.0004	W30xH18mm	\	Trim	1m / 2m / 3m / Tailored

N0.	Size	Cut Out	Type	Length
P10.0005	W30xH18mm	\	Trimless	1m / 2m / 3m / Tailored



BULLONA MINI TRACK

General Accessories



Accessories




Track Rail
W 11 * H2.25 mm



Track Cover
W14xH11.8mm



80W Power Feed Unit
L500/1000/1500mm
*Tailored cable length available
** Compatible with 0-10V application



80W Power Connector
L35/1000mm
*Tailored cable length available



80W Power Feed Unit
with PWM Signal Converter
L55xW13.5xH8.3mm
L200mm
*Tailored cable length available



120W Power Connector
L500mm
*Tailored cable length available
** Compatible with 0-10V application



120W Power Connector
L50mm
*Tailored cable length available



80W Power Feed Unit
with DALI Signal Converter
L43xW22xH11mm
L50mm
*Tailored cable length available

UOZU Lighting

via Francesco baracca 3/A 50127 Firenze, Italy
t +39 055 5321042 / f +39 055 5321043
info@uozulighting.com
www.uozulighting.com

V1.022Apr2022

BULLONA MINI TRACK

Suspension Aluminium Profile

U O Z U®




N0.	Size	Cut Out	Type	Length
P10.0006	W17 x H25mm	\	Low	1m / 2m / 3m / Tailored



Accessories



End cap
L17 x W25 x H21.2mm



Suspension Kit
L2000mm




N0.	Size	Cut Out	Type	Length
P10.0007	W17 x H68mm	\	High	1m / 2m / 3m / Tailored



Accessories



End cap
L17 x W68 x T2mm



Suspension Kit
L2000mm




N0.	Size	Cut Out	Type	Length
P10.0008	D21.5xH18.5mm	\	Round	1m / 2m / 3m / Tailored

Accessories



End cap
L21.5 x W18.5 x H8.1mm



Suspension Kit
L1500mm

