

23.5
*Customizable length

Product Specifications

Input Voltage	DC24V
Fixture Power	19.2W/m
Size	W23.5xH11 mm
Lumen Output*	1400 lm/m
Fixture Efficiency	72.9 lm/w
CRI	90
Color Temperature	2700K/3000K/4000K
Beam Angle	120°
Source Type	Citizen COB LED
Power Factor	-
Shielding Angle	60°
Control Method	Not dimmable, Phase-cut dimming, 0/1-10V dimming, DALI dimming

MacAdam Ellipse	<3 SDCM
CCT Tolerance	± 100 K
UGR	/
Product Dimensions	W23.5xH11 mm
Weight	/
Package Size	/
Carton Size	/

Safety Class	Class III
Ambient Temperature	-20°C-50°C
Storage Temperature	-20°C-50°C
Lumen Maintenance	-20°C-50°C, LED 50000H L90/B10-Ta25°
IP Rating	IP20
Housing Material	Extruded Aluminium
Housing Color	Anodised extruded aluminium
Warranty	3 years

*Lumen output measured @ 2700K, 15° optics, ambient temperature 25°C


Ordering code

NO.	Housing color	Watt	CRI	CCT	Beam Angle	Control Method	Reflector
07.0109	YY - Anodised YS - Anodised Silver	19.2- 19.2W	90	27 - 2700K 30 - 3000K 40 - 4000K	NN - 120°	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	0 - No Reflector


Example: 07.0109YY19.29027NNF0

Photometric Distribution

19.2W 120° 3000K



Assembly Indication

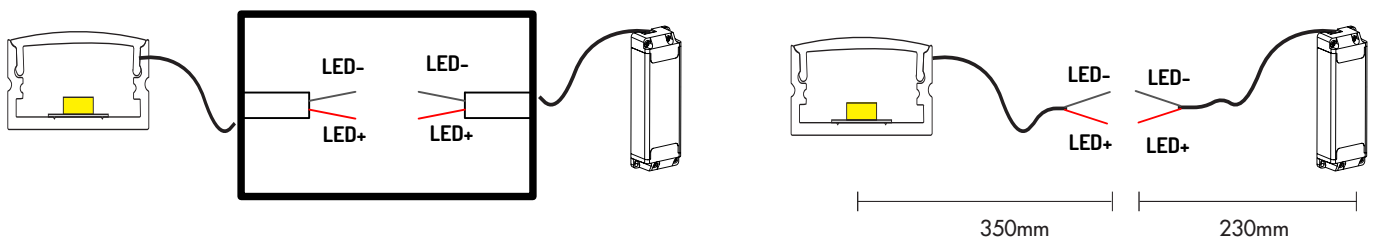

Installation Mode

