

\*Customizable length

### Product Specifications

Input Voltage	DC24V
Fixture Power	19.2W/m
Size	W17xH17.8 mm
Lumen Output*	1050 lm/m
Fixture Efficiency	54.6 lm/w
CRI	90
Color Temperature	2700K/3000K/4000K
Beam Angle	15°/80°
Source Type	Citizen COB LED
Power Factor	-
Shielding Angle	60°
Control Method	Not dimmable, Phase-cut dimming, 0/1-10V dimming, DALI dimming

MacAdam Ellipse	<3 SDCM
CCT Tolerance	± 100 K
UGR	/
Product Dimensions	W17xH17.8 mm
Weight	/
Package Size	/
Carton Size	/

Safety Class	Class II
Ambient Temperature	-20°C-50°C
Storage Temperature	-20°C-50°C
Lumen Maintenance	-20°C-50°C, LED 50000H L90/B10-Ta25°
IP Rating	IP20
Housing Material	Extruded Aluminium
Housing Color	Anodised extruded aluminium
Warranty	3 years

\*Lumen output measured @ 2700K, ambient temperature 25°C


### Ordering code

NO.	Housing color	Watt	CRI	CCT	Beam Angle	Control Method	Reflector
07.0107	YY - Anodised YS - Anodised Silver	19.2- 19.2W	90	27 - 2700K 30 - 3000K 40 - 4000K	15 - 15° 80 - 80°	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	0 - No Reflector


Example: 07.0107YY19.2902715F0

### Photometric Distribution


19.2W 15° 3000K



19.2W 80° 3000K



### Assembly Indication

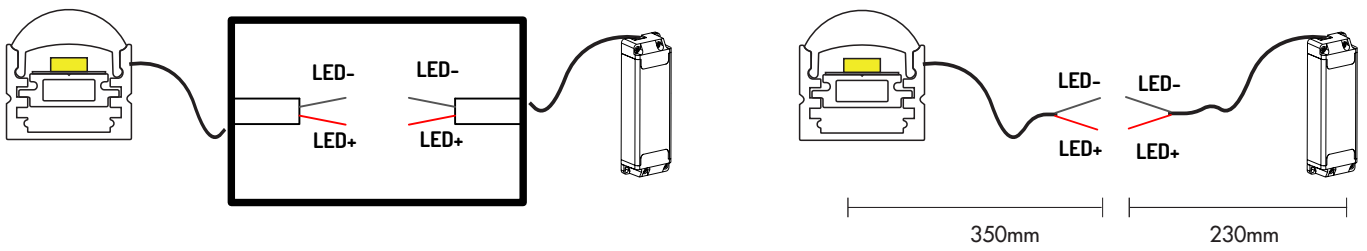

### Installation Mode

