

Adjustability

Hole size Ø69*H65 mm

Product Specifications

| | |
|--------------------|-----------------------|
| Input Voltage | AC 220 -240V, 50-60Hz |
| Fixture Power | 3W |
| Driving Current | 700 mA |
| Lumen Output* | 15 lm |
| Fixture Efficiency | 5 lm/w |
| CRI | 90 |
| Color Temperature | 2700K/3000K/4000K |
| Beam Angle | Asymmetric |
| Source Type | Citizen COB LED |
| Power Factor | - |
| Shielding Angle | 60° |
| Control Method | Not dimmable |

| | |
|--------------------|------------|
| MacAdam Ellipse | <3 SDCM |
| CCT Tolerance | ± 100 K |
| UGR | / |
| Product Dimensions | Ø75*H35 mm |
| Hole Size | Ø69*H65 mm |
| Weight | / |
| Package Size | / |
| Carton Size | / |

| | |
|---------------------|--------------------------------------|
| Safety Class | Class II |
| Ambient Temperature | -20°C-50°C |
| Storage Temperature | -20°C-50°C |
| Lumen Maintenance | -20°C-50°C, LED 50000H L90/B10-Ta25° |
| IP Rating | IP20 |
| Housing Material | Machined Aluminium |
| Housing Color** | RAL 9006, RAL 9016, RAL 9005 |
| Warranty | 3 years |

*Lumen output measured @ 2700K, ambient temperature 25°C

**RAL 9006 White aluminium, RAL 9016 Traffic white, RAL 9005 Jet black


Ordering code

| NO. | Housing color | Watt | CRI | CCT | Beam Angle | Control Method | Reflector |
|---------|---|----------|-----|--|------------|---|------------------|
| 05.0301 | YW - Matt white YB - Matt black XX - Customized Color | 003 - 3W | 90 | 27 - 2700K 30 - 3000K 40 - 4000K | Asymmetric | F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming | 0 - No Reflector |


Example: 05.0301YW003902700F0

Photometric Distribution

3W Asymmetric 2700K



Assembly Indication

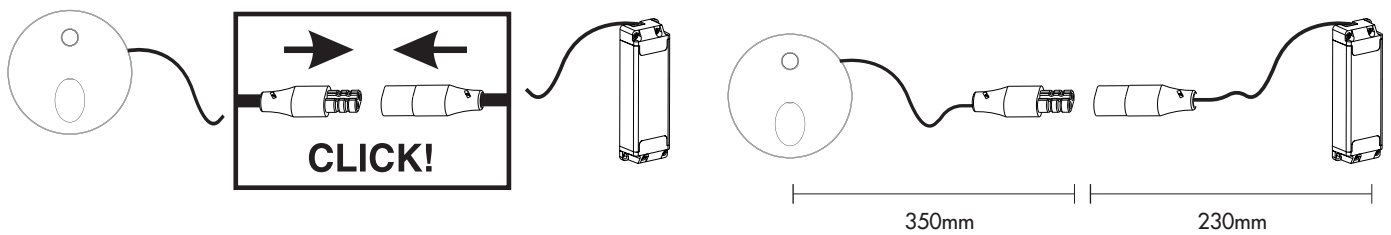

Accessories



Recessed mounting box