

Product Specifications

Input Voltage	DC24V
Fixture Power	4W
Driving Current	350 mA
Lumen Output*	152 lm
Fixture Efficiency	38.0 lm/w
CRI	90
Color Temperature	2700K/3000K/4000K
Beam Angle	125°
Source Type	Citizen COB LED
Power Factor	-
Control Method	Not dimmable, 0/1-10V dimming, DALI dimming

MacAdam Ellipse	<3 SDCM
CCT Tolerance	± 100 K
UGR	/
Product Dimensions	D50xH65mm
Weight	/
Package Size	/
Carton Size	/

Safety Class	Class III
Ambient Temperature	-20°C-50°C
Storage Temperature	-20°C-50°C
Lumen Maintenance	-20°C-50°C, LED 50000H L90/B10-Ta25°
IP Rating	IP67
Housing Material	Machined Aluminium
Housing Color**	RAL 9006, RAL 9016, RAL 9005
Warranty	3 years

*Lumen output measured @ 2700K, ambient temperature 25°C

**RAL 9006 White aluminium, RAL 9016 Traffic white, RAL 9005 Jet black


Ordering code

NO.	Housing color	Watt	CRI	CCT	Beam Angle	Control Method	Reflector
73.0201	YW - Matt white YB - Matt black XX - Customized Color	004 - 04W	90	27 - 2700K 30 - 3000K 40 - 4000K	NN - 125°	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	0 - No Reflector



Example: 73.0201YW0049027NNF0

Photometric Distribution

4W 125° 3000K



Assembly Indication

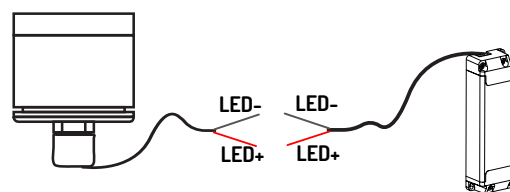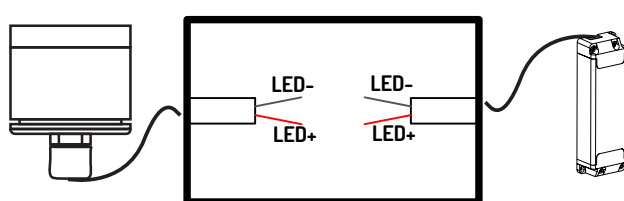

Mounting Accessories



Mounting box