

Product Specifications

Input Voltage		DC24V	
Fixture Power	6W/m	10W/m	14.4W/m
Size	W10xH4 mm	W10xH4 mm	W10xH4 mm
LED Qty.	2835 LED 120 LEDs/m	2835 LED 120 LEDs/m	2835 LED 120 LEDs/m
Lumen Output*	530 lm/m	880 lm/m	1250 lm/m
Fixture Efficiency	88.3 lm/w	88.0 lm/w	86.8 lm/w
CRI	90		
Color Temperature	2700K/3000K/4000K/6000K		
Beam Angle	120°		
Source Type	Citizen COB LED		
Power Factor	-		
Control Method	Not dimmable, Phase-cut dimming, 0/1-10V dimming, DALI dimming		
Safety Class	Class III		
Ambient Temperature	-20°C-50°C		
Storage Temperature	-20°C-50°C		
Lumen Maintenance	-20°C-50°C, LED 50000H L90/B10-Ta25°		
IP Rating	IP67		
Material	Extruded silicone		
Housing Color	/		
Warranty	3 years		

MacAdam Ellipse	<3 SDCM
CCT Tolerance	± 100 K
UGR	/
Product Dimensions	W10xH4 mm
Weight	/
Package Size	/
Carton Size	/

*Lumen output measured @ 2700K, ambient temperature 25°C


Ordering code

NO.	Housing color	Watt	CRI	CCT	Beam Angle	Control Method	Reflector
07.0202	AA - Natural color	006 - 6W 010 - 10W 14.4 - 14.4W	90	27 - 2700K 30 - 3000K 40 - 4000K	NN - 120°	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	0 - No Reflector


Example: 07.0202AA0069027NNF0

Photometric Distribution


14.4W 120° 3000K



Assembly Indication

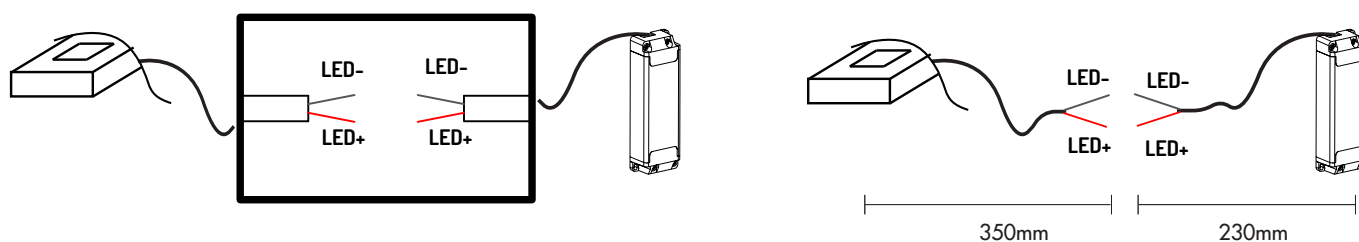

Installation Mode

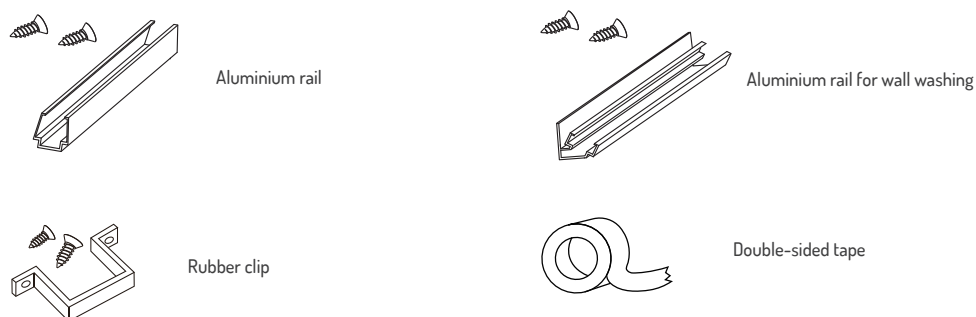

Cable Number Options

