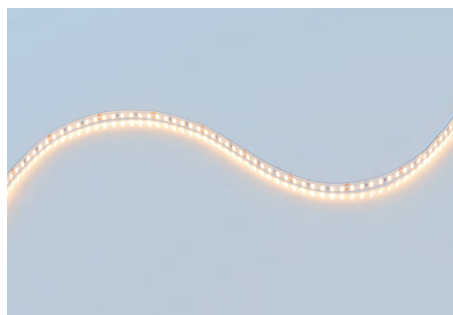


Product Specifications

Input Voltage		DC24V	
Fixture Power	4W/m	6W/m	10W/m
Size	W8xH2 mm	W8xH2 mm	W8xH2 mm
LED Qty.	2835 LED 60 LEDs/m	2835 LED 60 LEDs/m	2835 LED 60 LEDs/m
Lumen Output*	290 lm/m	450 lm/m	760 lm/m
Fixture Efficiency	72.5 lm/w	75.0 lm/w	76.0 lm/w
CRI	90		
Color Temperature	2700K/3000K/4000K/6000K		
Beam Angle	120°		
Source Type	Citizen COB LED		
Power Factor	-		
Control Method	Not dimmable, Phase-cut dimming, 0/1-10V dimming, DALI dimming		
Safety Class	Class III		
Ambient Temperature	-20°C-50°C		
Storage Temperature	-20°C-50°C		
Lumen Maintenance	-20°C-50°C, LED 50000H L90/B10-Ta25°		
IP Rating	IP20		
Material	Flexible printed circuit (FPC)		
Housing Color	/		
Warranty	3 years		

MacAdam Ellipse	<3 SDCM
CCT Tolerance	± 100 K
UGR	/
Product Dimensions	W8xH2 mm
Weight	/
Package Size	/
Carton Size	/

*Lumen output measured @ 2700K, ambient temperature 25°C


Ordering code

NO.	Housing color	Watt	CRI	CCT	Beam Angle	Control Method	Reflector
07.0201	AA - Natural color	4 - 4W 6 - 6W 10 - 10W	90	27 - 2700K 30 - 3000K 40 - 4000K	NN - 120°	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	0 - No Reflector


Example: 07.0201AA49027NNF0

Photometric Distribution


10W 120° 3000K



Assembly Indication

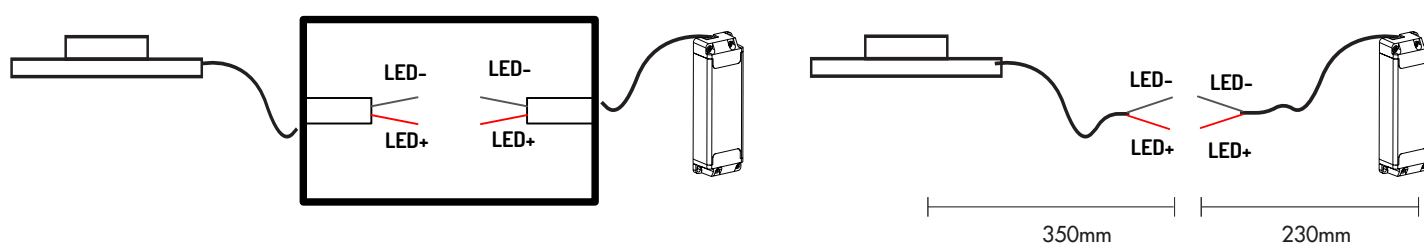


Installation Mode




Double-sided tape

Cable Number Options



Straight Wiring



Continuous Installation