




Features

The Cassiopea family includes a group of wall washers for outdoor spaces. They have a body of light aluminum with powder coating and a pre-treatment for outdoor use, clear glass, and a silicon rubber gasket. They have an IP66 rating and employ the newest generation of light sources, thus achieving a low heat resistance and high lighting efficiency. They are available in a variety of color temperatures and different body colors.

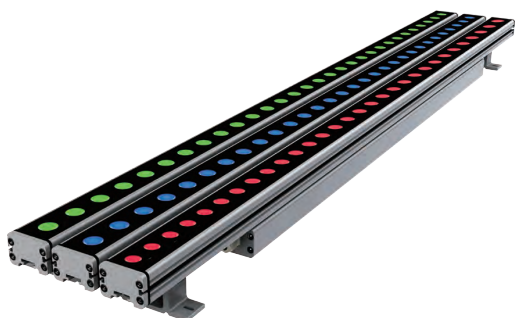

Product Specifications

Input Voltage	DC 24 V or AC 220V			
Length	313mm	605mm	900mm	1190mm
Fixture Power	15W	30W	45W	60W
LEDs / Fixture	/	/	/	/
Color Temperature	RGBW30 / RGBW40 / RGBW65			
Beam Angle	15° / 25° / 35° / 50° / 20°x50°			
Lumen Output /Length*	675 lm	1350 lm	2025 lm	2700 lm
Fixture Efficiency				
Max Run Length				
Control Method	DALI dimming			
CRI	90			
MacAdam Ellipse	<3 SDCM			
CCT Tolerance	100K			
Lumen Maintenance				
Ambient Temperature	-40° C to 50° C			
Housing /Lens Materials	Housing: Extruded Aluminium / Lens: Clear UV Resistant PMMA Cover: Tempered Glass Housing, bracket, end cap material – 6063 high density aluminum alloy			
Connector/ Cable	300mm power and signal feed-in cable with 6-Pin connector (junction cable to be specified)			
IP Rating	IP66			
IK Rating	IK08			
Mounting Options	Large Tilttable Stand (180° adjustable) Mounting Arms (available in 2 different sizes)			
Housing Color	RAL 9001 Cream, RAL 9006 White aluminium, RAL 9011 Graphite black, Anodised Charcoal grey			
Warranty	2 years			

*Lumen output measured @ 2700K, ambient temperature 25°C


Ordering code

NO.	Housing Color	Watt	CRI	CCT	Beam Angle	Control Method	Input Voltage
70.1070	YW - Matt white YB - Matt black	015 - 15W 030 - 30W 045 - 45W 060 - 60W	90	RGB2 - RGBW30 RGB4 - RGBW40 RGB7 - RGBW65	15 - 15° 25 - 25° 35 - 35° 50 - 50° CI - 20°x50°	F - Standard on-off P - Phase dimming A - 0/1-10V dimming D - Dali dimming	DC - DC 24 V AC - AC 220 V


Example :70.1070YW01590RGB215FDC

Photometric Distribution


LV 30W 15° RGBW40




HV 30W 20° RGBW40




LV/HV 30W 25° RGBW40

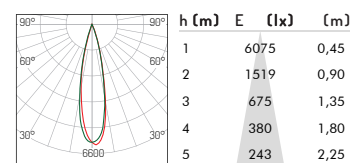



LV/HV 30W 35° RGBW40



LV/HV 30W 50° RGBW40




LV/HV 30W 20°x50° RGBW40

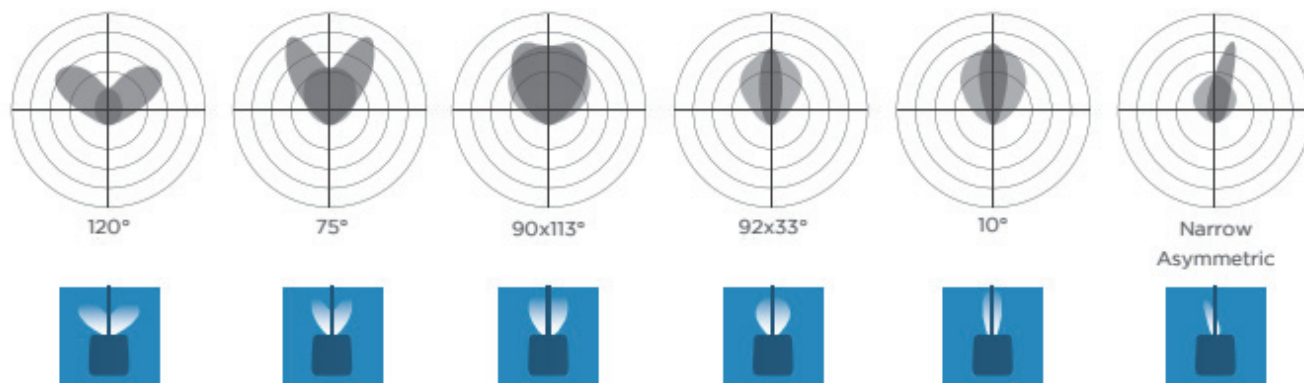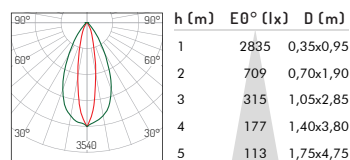


Application Guidance


Wall grazing optics

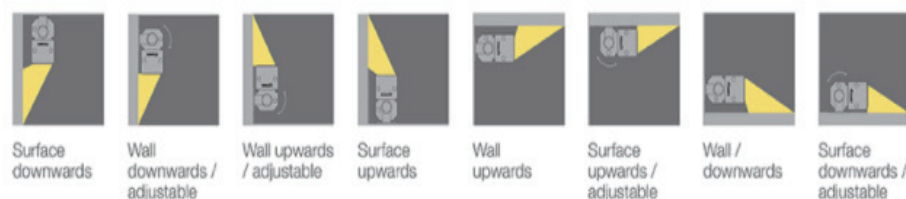

Symmetrical optics

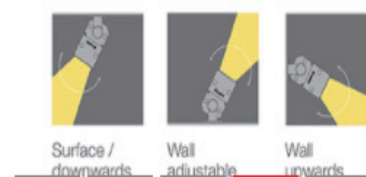



Product Dimensions

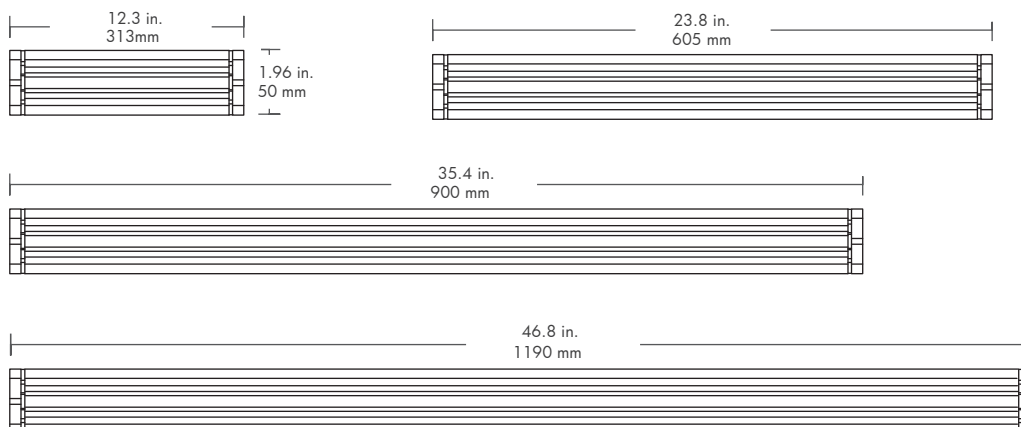

Mounting Accessories


Adjustable Bracket (two brackets included for each luminaires)

For adjustable mounting angles from 0-180°



Adjustable Arms


Adjustable arms designed for wall-mounted applications in three extendable options, the adjustability enable users to have different setbacks against the wall.

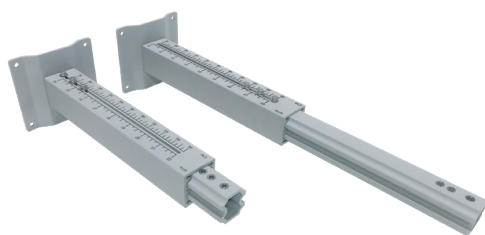

Optic Accessories

Symmetric Louver

For glare reduction
Note: This will affect beam angle





Side View

Ordering Code (need to order separately)

300 mm - XXXX
500 mm - XXXX
600 mm - XXXX
1000 mm - XXXX

Asymmetric Louver

For glare reduction
Note: This will affect beam angle

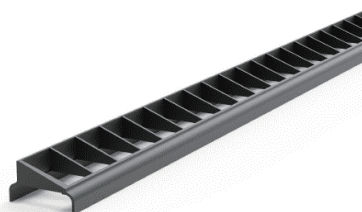


Side View

Ordering Code (need to order separately)

300 mm - XXXX
500 mm - XXXX
600 mm - XXXX
1000 mm - XXXX

Glare Shield

To reduce glare or redirect light



Side View

Ordering Code (need to order separately)

300 mm - XXXX
500 mm - XXXX
600 mm - XXXX
1000 mm - XXXX

Cables & Wiring Diagram

Part Number: MINICBLFB



2 Pin Power Feed Connector

Part Number: MINIJUMPMF





2 Pin Power Junction Connector


Ordering Code (order separately)

300 mm - XXXX
500 mm - XXXX
600 mm - XXXX
1000 mm - XXXX


Not dimmable

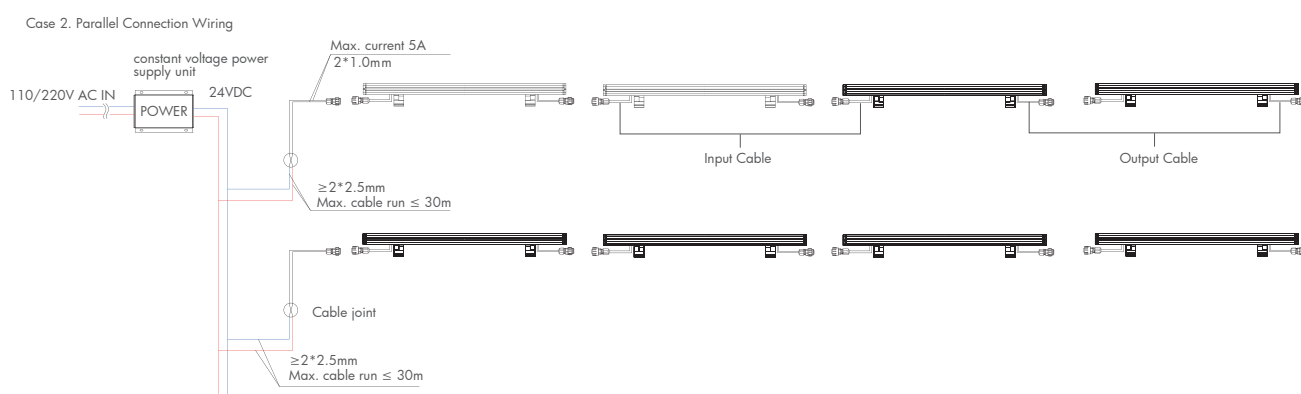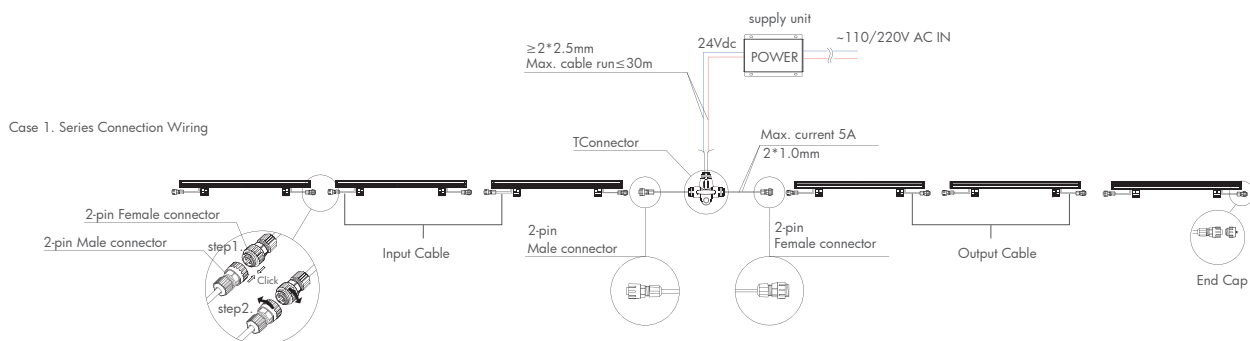

0-10V DIMMING:

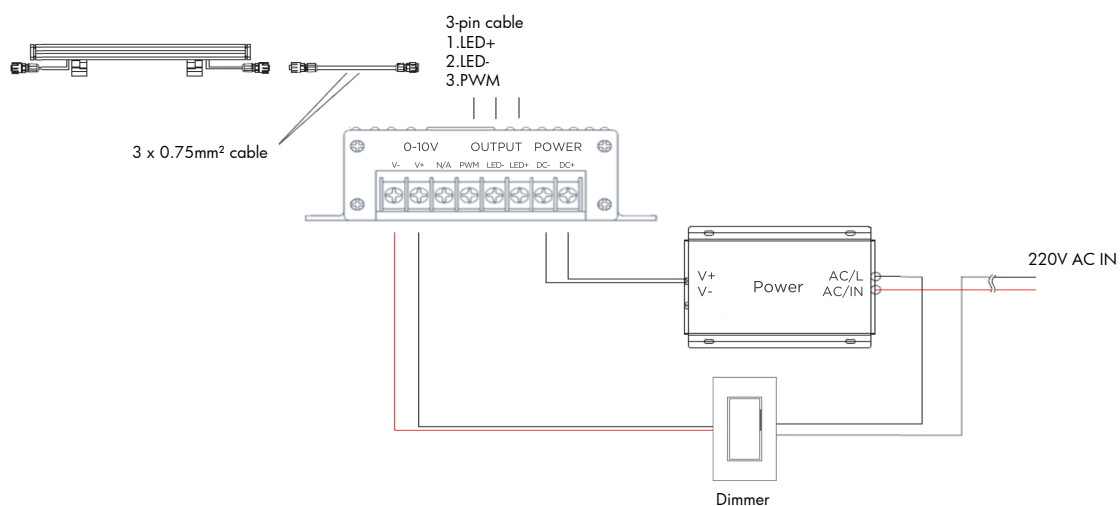

DALI DIMMING:

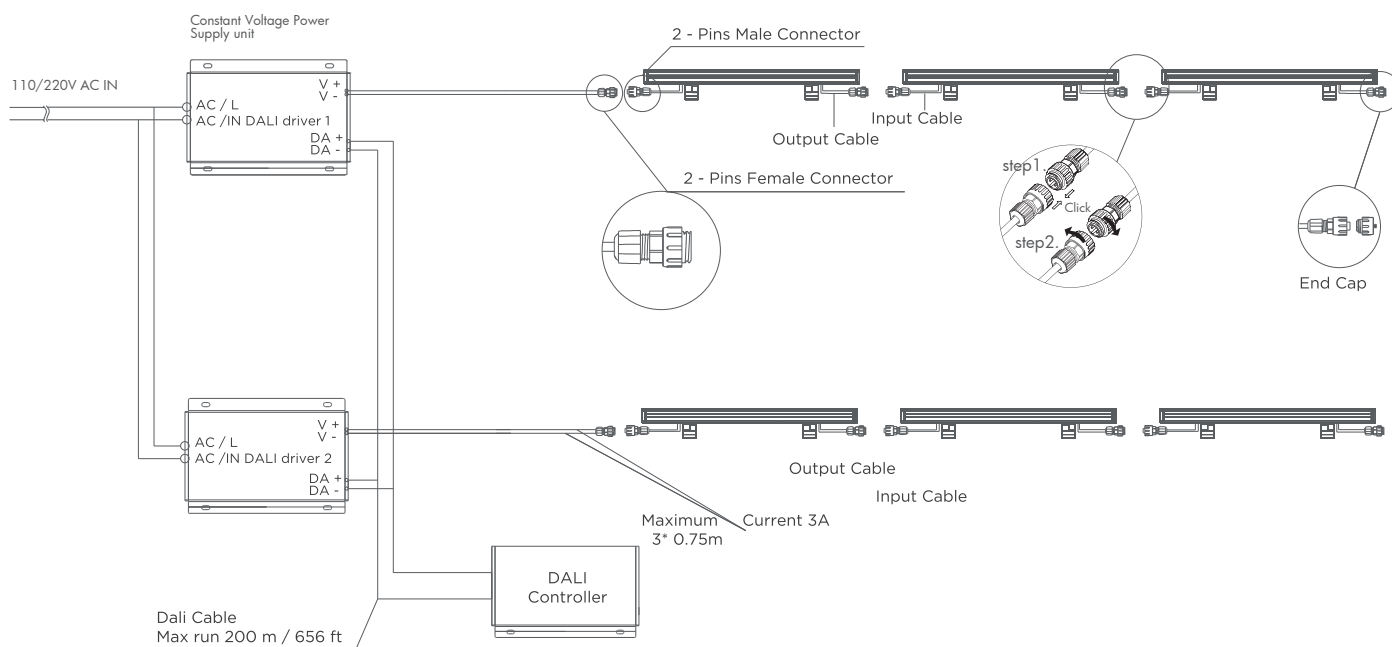

CONNECTORS:

